



## LED LAMPS

# ProLED<sup>®</sup> Omnidirectional A-Shape Series



Dimmable



Omnidirectional



Enclosed Rated

ProLED<sup>®</sup> Omnidirectional A-Shape Series dimmable lamps feature superior thermal construction for long life and energy efficient illumination



**Omnidirectional Optical Design Provides 300° Light Distribution**

**UL Listed for Damp Location & Enclosed Fixtures**

**ENERGY STAR<sup>®</sup> Certified**

**Backed by a 5-Year Warranty**

### **Applications:**

Home  
Education  
Healthcare  
Hospitality  
Retail

### **Markets:**

Residential  
Commercial

**Halco**<sup>®</sup>  
LIGHTING TECHNOLOGIES

Contact Your Customer Care Specialist  
For Pricing, Orders And Technical Support.

800.677.3334 [www.halcolighting.com](http://www.halcolighting.com)

# ProLED<sup>®</sup>

## Omnidirectional A-Shape Series


Product #: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_ Date: \_\_\_\_\_


Comments: \_\_\_\_\_ Initials: \_\_\_\_\_

### Specifications

- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location
- Dimmable to 5% for design flexibility
- 300° degree beam angle creates uniform distribution of light

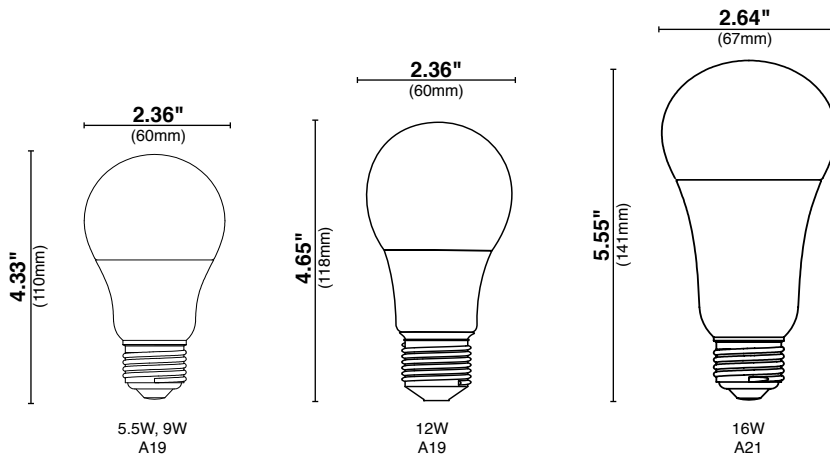

### Savings Comparison

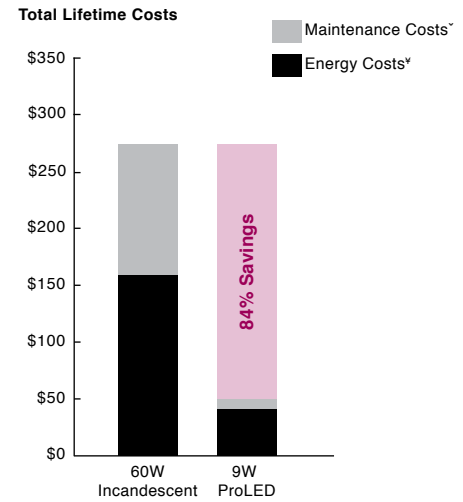

### Ordering Information



	Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Angle	Pkg. Qty.	MOL	Equivalent Wattage
⊕	5.5	Medium	80965	A19FR5/827/OMNI/LED •	120	2700	82	450	25,000	300°	1/6	4.33"	40
⊕	5.5	Medium	80966	A19FR5/830/OMNI/LED •	120	3000	82	470	25,000	300°	1/6	4.33"	40
⊕	9	Medium	80967	A19FR9/827/OMNI/LED •	120	2700	82	800	25,000	300°	1/6	4.33"	60
⊕	9	Medium	80968	A19FR9/830/OMNI/LED •	120	3000	82	830	25,000	300°	1/6	4.33"	60
⊕	9	Medium	80969	A19FR9/840/OMNI/LED •	120	4000	82	860	25,000	300°	1/6	4.33"	60
⊕	9	Medium	80970	A19FR9/850/OMNI/LED •	120	5000	82	900	25,000	300°	1/6	4.33"	60
	12	Medium	80939	A19FR12/827/OMNI/LED •	120	2700	82	1100	25,000	300°	1/6	4.65"	75
	12	Medium	80940	A19FR12/830/OMNI/LED •	120	3000	82	1140	25,000	300°	1/6	4.65"	75
⊕	16	Medium	80947	A21FR16/827/OMNI/LED •	120	2700	82	1600	25,000	300°	1/6	5.55"	100
⊕	16	Medium	80945	A21FR16/830/OMNI/LED •	120	3000	82	1650	25,000	300°	1/6	5.55"	100
⊕	16	Medium	80946	A21FR16/840/OMNI/LED •	120	4000	82	1720	25,000	300°	1/6	5.55"	100
⊕	16	Medium	80948	A21FR16/850/OMNI/LED •	120	5000	82	1800	25,000	300°	1/6	5.55"	100

⊕ NEW ITEM!

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Represents lamps that are ENERGY STAR<sup>®</sup> certified.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase, based on 10 hours of use per day.

• May not be compatible with all dimming systems, dimming performance may vary by system, please check the website [www.halcolighting.com/ProLEDdim](http://www.halcolighting.com/ProLEDdim) for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.

25,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.