



LED LAMPS

ProLED[®] **MR11 Series**



Dimmable



40,000 Hour Life



Low Maintenance



WARRANTY
5-Year Warranty

High power LED with superior optics and thermal construction for long life and energy efficient illumination



Form Factor Maximizes Efficiencies and Provides Uniform Beam Distribution

Dimmable to 5% for Design Flexibility

Narrow Flood and Flood Distributions

GU4 and Bayonet Base Options

Applications:

- Accent
- Display
- Hospitality
- Office
- Retail

Markets:

- Residential
- Commercial

ProLED[®]

MR11 Series


Product #: _____ Type: _____

Project: _____ Date: _____


Comments: _____ Initials: _____

Specifications

- ProLED[®] MR11 lamps' long life lasts up-to 14 times longer than traditional sources, saving on maintenance costs
- Up-to 82 CRI for quality and consistent color rendering
- Flood or Narrow Flood beam angle options
- 10-18V range eliminates voltage drop calculation
- GU4 and Bayonet base options maximize installation flexibility

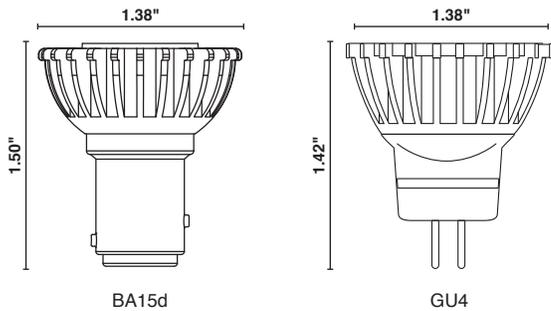

Energy Savings Comparison

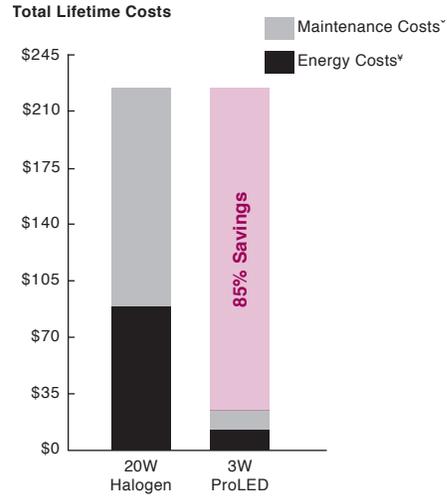

[†] Maintenance costs based on 15 minutes at \$40 per/hr
[¥] Energy costs based on \$0.11 kWh

Ordering Information



| Watt | Base | Product # | Product Code | Description | Volts | Color Temp. | CRI | Lumens | CBCP | Useful Life* | Beam Spread | Pkg. Qty. | MOL | Equivalent Wattage |
|------|-------|-----------|-----------------------|-----------------|-------|-------------|-----|--------|------|--------------|-------------|-----------|-------|--------------------|
| 3 | GU4 | 81093 | MR11FTD/827/LED | Flood ++ | 10-18 | 2700 | 82 | 230 | 420 | 40,000 | 30° | 1/10 | 1.42" | 20 |
| 3 | BA15d | 81094 | MR11FTD/827/BA15D/LED | Flood ++ | 10-15 | 2700 | 82 | 230 | 420 | 40,000 | 30° | 1/10 | 1.5" | 20 |
| 3 | GU4 | 81095 | MR11FTD/850/LED | Flood ++ | 10-18 | 5000 | 82 | 250 | 500 | 40,000 | 30° | 1/10 | 1.42" | 20 |
| 3 | GU4 | 81096 | MR11FTC/827/LED | Narrow Flood ++ | 10-18 | 2700 | 82 | 230 | 600 | 40,000 | 22° | 1/10 | 1.42" | 20 |

o NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase, based on 10 hours of use per day.

May not be compatible with all electronic transformers. Magnetic transformers are recommended for dimming applications.

Not for use in enclosed fixtures.

+ May not be compatible with all dimming systems, dimming performance may vary by system. Use on incompatible systems may shorten lamp life.

Lamps should be tested in the application for compatibility prior to full installations on circuits using such devices.

++ Acceptable for use in sealed metal landscape fixtures when protected from the elements.