

ProLED. Square Downlights



ProLED 4" and 6" square downlights give a unique design and memorable lighting impression



Unique Rotating Collar Allows Alignment to Walls and Other Luminaires

10 Watt (4") and 15 Watt (6") Replace Up to 65 Watt Incandescent (80% Energy Savings)

Dimmable

5-Year Limited Warranty ENERGY STAR® Certified

Applications:

Home Office Lobby Hospitality Retail Conference room

Markets:

Residential Commercial




Contact Your Customer Care Specialist For Pricing, Orders And Technical Support.

ProLED. Square Downlights

Product #:	Type:	
Project:	Date:	
Comments:	Initials:	

Specifications

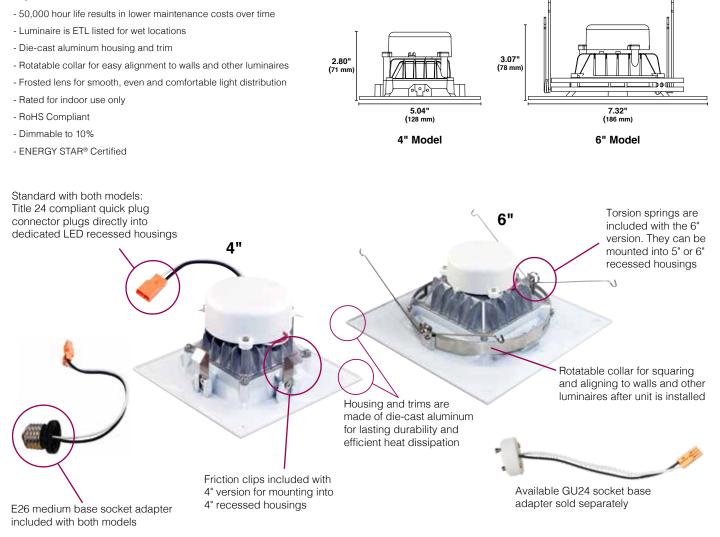

Ordering Information



	Watt	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Dimmable	Pkg. Qty.	Fixture Size	Beam Spread	Equivalent Wattage
0	10	99952	QDL4FR10/927/LED	120	2700K	90	560	50,000	Yes	1/12	4"	92°	50
0	10	99953	QDL4FR10/930/LED	120	3000K	90	560	50,000	Yes	1/12	4"	92°	50
0	10	99954	QDL4FR10/940/LED	120	4000K	90	590	50,000	Yes	1/12	4"	92°	50
0	10	99955	QDL4FR10/950/LED	120	5000K	90	630	50,000	Yes	1/12	4"	92°	50
0	15	99956	QDL6FR15/927/LED	120	2700K	90	900	50,000	Yes	1/12	6"	97°	65
0	15	99957	QDL6FR15/930/LED	120	3000K	90	930	50,000	Yes	1/12	6"	97°	65
0	15	99958	QDL6FR15/940/LED	120	4000K	90	1000	50,000	Yes	1/12	6"	97°	65
0	15	99959	QDL6FR15/950/LED	120	5000K	90	1040	50,000	Yes	1/12	6"	97°	65
		91003	ADP/DL/GU24/LED	GU24 So	cket Adapter								

♦ NEW ITEM

Represents lamps that are ENERGY STAR[®] certified.

* Useful Life is defined as the point in time at which the LED will maintain at least 70% of its initial lumens. The LED will continue to burn past this point, but at decreased light levels

Warranty - Commercial / Industrial: This product is warranted for 5 years from the date of purchase, based on 10 hours of use per day.

May not be compatible with all dimming systems, dimming performance may vary by system, please check the website www.halcolighting.com/ProLEDdim for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.