

SECURITY WALL LIGHTS



Product Description

naturalLED® Wall Lights double head bullet with motion sensor. Our security floodlights come in 20-watt to replace your existing incandescent up to 200-watt, saving up to 90% of energy. Super energy efficient and lasts up to 50,000+ hours average life. naturalLED® security lights are ideal solution for security lights, both residential, commercial and many other outdoor applications.



Features & Benefits

- ▶ Energy Star Qualified
- ▶ UL Wet
- ▶ Up to 80% energy savings
- ▶ Instant on
- ▶ Light weight
- ▶ Contains no mercury or lead
- ▶ 50,000 hrs rated average life

Specifications


- ▶ Input line voltage: 120V
- ▶ Power Factor: >0.9
- ▶ THD: <20%
- ▶ Beam Angle: Flood
- ▶ Operating temperature: -22°F - 122°F
- ▶ Finish: Black / White

Applications




- ▶ Security Lighting
- ▶ Accent Lighting
- ▶ Residential Lighting
- ▶ Outdoor Lighting
- ▶ Wall Lighting

Optional Accessories

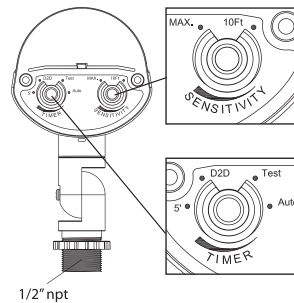- ▶ Motion / Daylight Sensor
For Security Flood Light
P10118 SEN-ES-180NX3-2VR/BK




Ordering Information

Code	Description	CCT	Watt	Lumen	Equiv Wattage	Style	Beam Angle	Color	Rated Hrs		
	Security Flood Light w/Sensor										
7030	LED-FXBFD20/830/BK-SEN	3000K	20	1,400	200	Security	70	Black	50,000	•	•
7031	LED-FXBFD20/850/BK-SEN	5000K	20	1,400	200	Security	70	Black	50,000	•	•
7066	LED-FXBFD20/830/WH-SEN	3000K	20	1,400	200	Security	70	White	50,000	•	•
7067	LED-FXBFD20/850/WH-SEN	5000K	20	1,400	200	Security	70	White	50,000	•	•

Photometric Data

BFD- Double Head Round

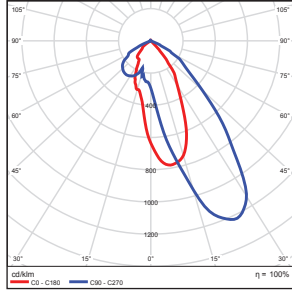

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	540.68	39.80
0-40	834.24	61.40
0-60	1247.96	91.80
60-80	104.99	7.70
70-80	23.00	1.70
90-120	0.22	0.00
90-180	5.42	0.40
0-180	1359.13	100.00

Total Luminaire Efficiency = 100.00%

Illuminance at a Distance


	Center Beam fc		Beam Width	
	Center Beam fc	Beam Width	Beam Width	Beam Width
17.0ft	2.17 fc	6.8 ft	10.3 ft	
34.0ft	0.54 fc	13.6 ft	20.5 ft	
51.0ft	0.24 fc	20.5 ft	30.8 ft	
68.0ft	0.14 fc	27.3 ft	41.1 ft	
85.0ft	0.09 fc	34.1 ft	51.3 ft	
102.0ft	0.06 fc	40.9 ft	61.6 ft	

■ Vert. Spread: 22.7°
■ Horiz. Spread: 33.6°

Product Dimensions

FXBFD

Weight: 2.43-lbs

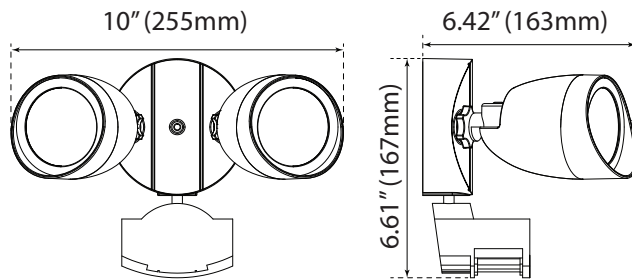

Package

